

Servo amplifier

mcDSA-F55-SSI

Article number: 1515922



Picture similar

Technical data

Supply voltages	
Electronic supply voltage Ue*1	9..30 V
Electronic current consumption@ Ue=24V*2	typ. 60 mA
Power supply voltage Up*3	9..60 V
Output current	
Max. output current	50 A
Continuous output current @ Up=24V*4	14.5 A
Continuous output current @ Up=48V*5	13 A
PWM	
PWM frequency	32 kHz
Commutation type	Field Oriented Control
Mechanical	
Size LxWxH	78 x 74 x 49 mm
Weight	145 g
Environment	
Protection class	IP20
Ambient temperature (operation)*6	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	yes
RS485	
Type	2-Wire EIA-485
Signals	DATA,/DATA,CLK,/CLK
Sensor supply (Encoder/Hall/SSI)	
Output voltage	5 V
Max. output current	0.2 A

Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,H2,H3
Max. frequency (per channel)	10 kHz
Input voltage	0..5 V
Signal type	open collector, single ended
Digital inputs	
Number - digital inputs	7 (Din0..6)
Number - hardware enable inputs	2 (EN-A..B)
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	4 (Dout0..3)
Continuous output current	0.3 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Analog inputs	
Number	3 (Ain0..2)
Signal type - Ain0..1	+/- 10 V, 12 Bit, differential
Signal type - Ain2 / PT1000	0..5 V, 12 Bit, single ended / PT1000

*1 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 33V$ or short-term peak voltage of $37V < 1s$

*2 power amplifier switched off, 5V output (sensor supply) is free

*3 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 70V$ *4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 14.5 A \rightarrow 10.3 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 13 A \rightarrow 9.2 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*6 Hex-Switches should be not used at $T < -25^{\circ}C$ (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2025 by miControl® - Modifications and errors excepted
mcDSA-F55-SSI - PV1.14.00.08 / DV1.00.00.03

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

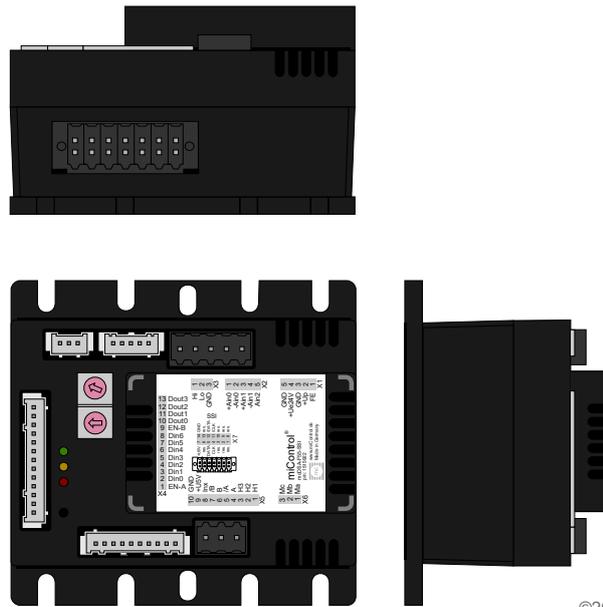

©2025 by miControl

Terminal assignment

X1 Supply		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	+Ue24V	Electronic supply voltage
5	GND	Ground for electronic supply voltage
X2 Analog inputs		
1	+Ain0	Analog input 0, plus
2	-Ain0	Analog input 0, minus
3	+Ain1	Analog input 1, plus
4	-Ain1	Analog input 1, minus
5	Ain2	Analog Input 2 (5V) / PT1000
X3 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	CAN GND	CAN Ground
X4 Digital inputs/outputs		
1	EN-A	Hardware enable channel A
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	Din6	Digital input 6
9	EN-B	Hardware enable channel B
10	Dout0	Digital output 0
11	Dout1	Digital output 1
12	Dout2	Digital output 2
13	Dout3	Digital output 3

X5 Hall and inc. encoder			
1	H1	Hall sensor 1	
2	H2	Hall sensor 2	
3	H3	Hall sensor 3	
4	A	Inc. encoder, A channel	
5	/A	Inc. encoder, A channel inverted	
6	B	Inc. encoder, B channel	
7	/B	Inc. encoder, B channel inverted	
8	Inx	Inc. encoder, index channel	
9	+U5V	5V output voltage for sensor supply Sensors: encoder, hall	
10	GND	Ground for sensor supply Notice: don't connect with system GND	
X6 Motor			
1	Ma	Motor phase A	
2	Mb	Motor phase B	
3	Mc	Motor phase C	
X7 Encoder			
1	res.	Reserved	
2	res.	Reserved	
3	res.	Reserved	
4	CLK	SSI clk	
5	DATA	SSI data	
6	res.	Reserved	
7	+U5V	5V output voltage for sensor supply Sensors: encoder, SSI	
8	res.	Reserved	
9	res.	Reserved	
10	res.	Reserved	
11	/CLK	/SSI clk	
12	/DATA	/SSI data	
13	res.	Reserved	
14	GND	Ground for sensor supply Notice: don't connect with system GND	